



## Free-Standing Single Door - No Freezer

SSM4460XN



### FEATURES

- Metal håndtag
- 38 dBA
- 252 liter
- Vin/flaske holder

#### Vin/flaske holder

Opbevaring af flasker til køling kan være pladskrævende og medføre risiko for, at flaskerne ikke ligger stabilt. En vinhylde er tilpasset flaskens form, så den holder sig stabil og med nem adgang. Hyliden fungerer også godt til sodavandsflasker eller andre flasker.

#### Metal håndtag

Blombergs køleprodukter er udstyret med brugervenlige og robuste metalhåndtag, der ikke kun gør det let at åbne døren, men også giver skabet et elegant udseende.

#### LED lys


Belysning med hvidt LED-lys, giver bedre oversigt i skabet, et mere æstetisk udseende og et mindre energiforbrug.

### GENERAL

Type	Free-Standing
Capacity	252 liters
Color	White
Freezer Position	No Freezer
Cooling System Type	Static
Control	Rotational Controller on Ceiling
Control System	Mechanic
Display	No
Display Type	No Display
Light	LED
Door Opening Direction	Right
Reversible Door	Yes
Open Door Alarm	No
Quick Cool	No
Eco Mode	No
Holiday Mode	No
VitaminZone	No
Dairy Compartment	No
Glas Shelves	Glass-All standard
Wine Rack Type	Wine Rack-Full Width

### PERFORMANCE AND TECHNICAL INFORMATION

Energy Efficiency Class	E
Noiselevel	38 dBA
Noiselevel Class	C
Climat Class	SN-T
Dimensions (HxWxD)	145.7 x 54.0 x 57.5 cm
Plug Type	European
Cable Lenght	2.20 m
Energy Consumption (kWh/annum)	105.12 kWh/annum
Refrigerant	R600a
Refrigerant Charge (kg)	0.025

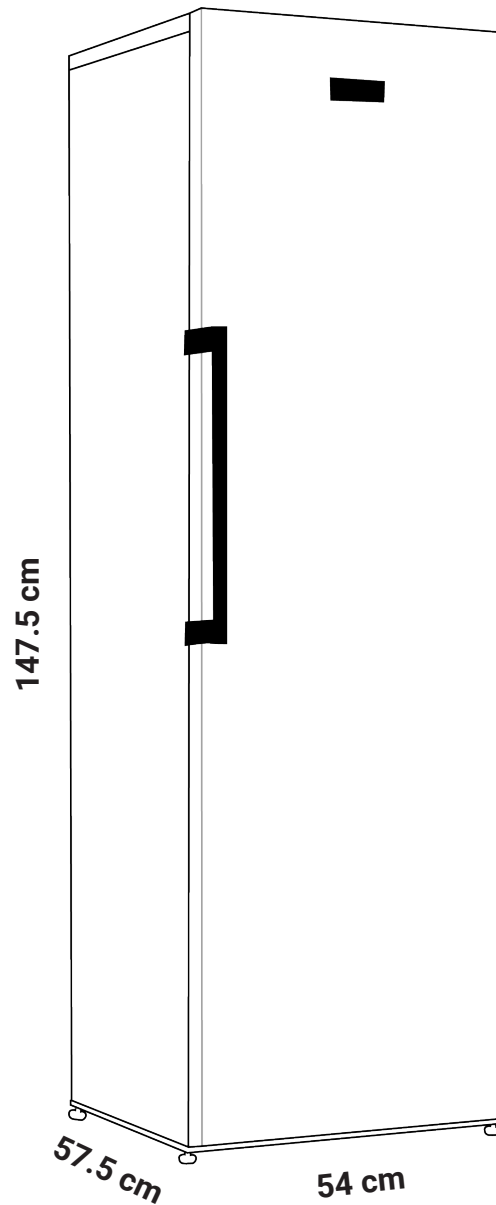

- Place the product on a flat surface to avoid vibration.
- Place the product at least 30 cm away from the heater, stove and similar sources of heat and at least 5 cm away from electric ovens.
- Do not expose the product to direct sunlight or keep it in damp environments.
- Your product requires adequate air circulation to function efficiently. If the product will be placed in an alcove, remember to leave at least 5 cm clearance between the product and the ceiling, rear wall and the side walls.
- Check if the rear wall clearance protection component is present at its location (if provided with the product).
- If the component is not available, or if it is lost or fallen, position the product so that at least 5 cm clearance shall be left between the rear surface of the product and the wall of the room. The clearance at the rear is important for efficient operation of the product.
- If two refrigerators are to be installed side by side, there should be at least 4 cm distance between them.